


# Cembrit Transparent

## Facade

Cembrit Transparent facade boards combine the textured nuances and natural characteristics of the base board with a long-lasting performance of the transparent top coat. The color added to the fiber cement reveals and highlights the fibers and other raw materials that provide its strength and character.

The extremely durable transparent coating then protects the board and ensures a smooth surface with a long service life. Cembrit facade boards are a high-quality fiber cement used as a part of a ventilated facade solution on all types of constructions.

Dimensions	Thickness	Width in	Length in
Untrimmed size	0.3125 in	50.4	99.6 121.2
Standard size	0.3125 in	46.9	98.4 120.1
Maximum usable size	0.3125 in	49.2	98.4 120.1

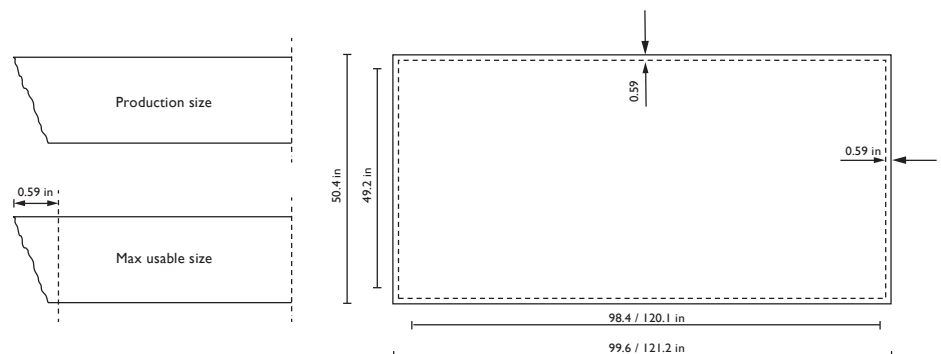

[www.cembrit.com](http://www.cembrit.com)  
Please visit the local website for contact details and further information.

[www.americanfibercement.com](http://www.americanfibercement.com)  
Please visit for contact details and further information.

## Cembrit Solid

<b>Dimension after trimming</b>			
Width	in	46.9	46.9
Length	in	98.4	120.1
Thickness	in	0.3125	0.3125
<b>Physical properties</b>			
Density, dry	lb/ft <sup>3</sup>	≥96.76	≥96.76
Weight	lb/ft <sup>2</sup>	~3.21	~3.21
<b>Mechanical properties</b>			
Dry E-module	psi x10 <sup>6</sup>	1.88	1.88
Modulus of rupture (wet condition)	psi x10 <sup>3</sup>	≥2.61	≥2.61
<b>Thermal properties</b>			
Temperature range	°F	Max. 176	Max. 176
Frost resistance	Cycles	>100	>100
<b>Tolerances (ref. EN 12467)</b>			
Thickness	%	±10	±10
Length	in	±0.12	±0.12
Width	in	±0.08	±0.08

For more specifications, please visit the Cembrit Transparent [metric](#) datasheet