


Cembrit Cover

Facade

Cembrit Cover is the ideal solution if you prefer the strongest colors and bolder design statements. The natural grey fiber cement core is completely covered by a layer of water-based acrylic paint, with 26 standard Cembrit colors and more than 2000 NCS® colors to choose from.

Cembrit facade boards are a high-quality fiber cement used as a part of a ventilated facade solution on all types of constructions.

Dimensions	Thickness	Width in	Length in
Untrimmed size	0.3125 in	50.4	99.6 121.2
Standard size	0.3125 in	46.9	98.4 120.1
Maximum usable size	0.3125 in	49.2	98.4 120.1

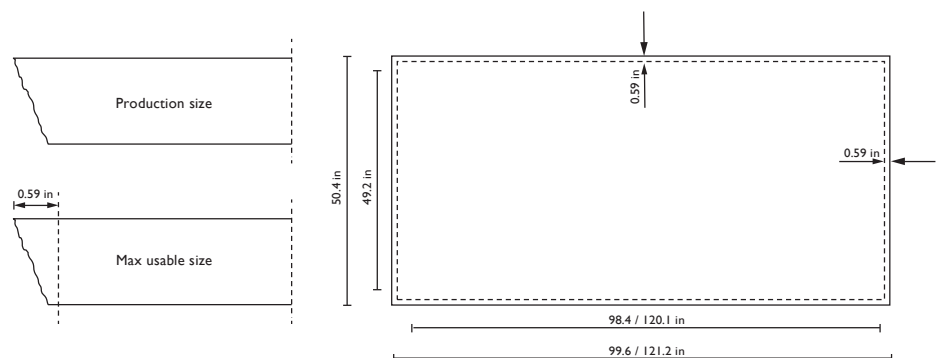

Cembrit Cover

Dimension after trimming			
Width	in	46.9	46.9
Length	in	98.4	120.1
Thickness	in	0.3125	0.3125
Physical properties			
Density, dry	lb/ft ³	≥96.76	≥96.76
Weight	lb/ft ²	~3.21	~3.21
Mechanical properties			
Dry E-module	psi x10 ⁶	1.88	1.88
Modulus of rupture (wet condition)	psi x10 ³	≥2.61	≥2.61
Thermal properties			
Temperature range	°F	Max. 176	Max. 176
Frost resistance	Cycles	>100	>100
Tolerances (ref. EN 12467)			
Thickness	%	±10	±10
Length	in	±0.12	±0.12
Width	in	±0.08	±0.08

For more specifications, please visit the Cembrit Cover [metric datasheet](#)